

Fire fighting
helmet

SCA1205R

Save your life, Keep your family


HANCOM LIFECARE

WARNING

1. The fire helmet SCA1205R must be inspected and serviced on a regular basis by competent personnel.
2. The fire helmet SCA 1205R must not be modified or fitted with third-party components. Individual parts may only be replaced if the replacement parts are of identical type to the individual parts of the type-tested fire helmet SCA1205R or have been specially approved by Hancom Lifecare for use as replacement parts. Incorrect or third-party inner fittings, the drilling of new holes for accessories or other modifications to the fire helmet SCA1205R can adversely affect the protective function and result in cancellation of the official approval for use.
3. The responsibility for proper function of the fire helmet SCA1205R totally depends on owner or operator if the fire helmet is serviced or repaired by personnel not employed or authorized by Hancom Lifecare or if it is used in a manner not conforming to its intended use.

Hancom Lifecare cannot guarantee any damage caused by noncompliance with the recommendations given above.

■ PRODUCT AND PARTS

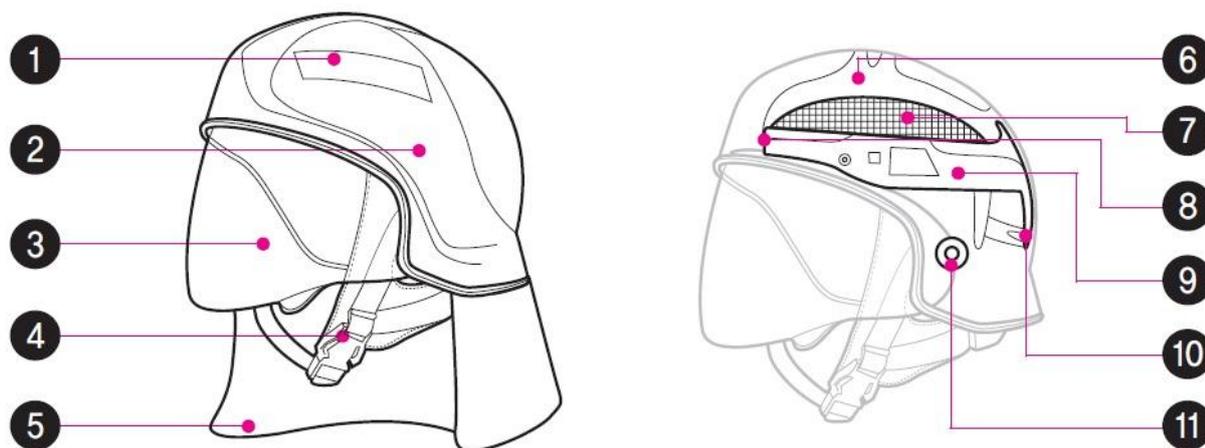

- ① Reflect tape ② Outer shell ③ Face shield ④ Chin strap ⑤ Neck protector
⑥ Shock absorber ⑦ Inner liner ⑧ Headband ⑨ Inner frame ⑩ Headband adjustment
⑪ Faceshield hardkit

■ USE INSTRUCTIONS AND LIMITATIONS

The fire helmet is designed to protect wearer's head against impact caused by falling object, or heat at scene of a fire or work place. Do not use this fire helmet except its intended use. It might be a cause of safety accidents.

■ WEARING PROCEDURE

1. Raise the faceshield inside the helmet.
2. Loosen the chinstrap by pulling postman's slide.
3. Put on the helmet.
4. Fit the headband's size on your head by adjusting the ratchet headband knob.
5. Tighten the chinstrap.
6. Check the fit and comfort.
7. Lower the faceshield to cover the face and eyes.
8. If you feel any discomfort, repeat steps 1~5 until comfortable fit is achieved.

■ INSPECTION

Before use

1. Adjustment of the headband
Turn the headband adjustment at the back of the helmet counterclockwise to loosen the headband fully. Slowly turn the handle clockwise until it fits your head.
2. Adjustment of suspension height
Use the adjustment rings on the left and right sides of the headband to adjust the height of suspension and adjust the impact net on your head by connecting hooks fixed to the left and right horizontally.
3. Adjustment of the faceshield
In case the faceshield is loose, and if it moves up and down, tighten the screws on the left and right sides of the helmet.

After use

Check for any cracks and deformation on the outer shell, damage to the neck protector, cracks on and decreased transparency of the faceshield, damage to the chinstrap, and damage to the impact net.

CAUTIONS

1. Do not apply excessive force to tighten the screws on the left and right sides of the helmet. It might damage the screws and render them unusable.
2. Scratches on the surface of the faceshield can affect vision. Therefore, replace the defective part before use.

■ CLEANING AND STORAGE

1. Detach the neck protector and remove foreign substances from the helmet.
2. Moisten a soft cloth with a neutral detergent diluted in warm water and clean the outer shell, headband, neck protector, and chinstrap.
3. Moisten a soft cloth with distilled or clean water and clean each part of the helmet. Use a soft, dry cloth to remove moisture from each part of the helmet.
4. Clean the faceshield with a dry cloth.
5. Avoid exposure to direct sunlight and high heat. Dry the helmet completely in a well-ventilated place at room temperature and store in a cool, dry place.

CAUTIONS

1. Use clean water and cloth to clean the fire helmet.
2. A UV coating is applied to the surface of the faceshield to prevent scratches. Clean the faceshield with a clean, dry, soft cloth.
3. Keep the helmet in a safe place and away from external load to avoid disfiguring it.

WARNING

Do not use solvents such as acetone, benzene, chemical agent, or gasoline to clean the helmet (such substances may decrease the performance of the helmet). In case these materials or their equivalent are used, the protective function of the helmet cannot be guaranteed.

WARRANTY

1. In case manufacturing defects occur on the product or its parts during the warranty period, contact the Company for immediate repair or replacement.
2. Under any of the following cases, however, services will be charged even during the warranty period:
 - A. Damage due to careless handling by the customer
 - B. Damage due to unauthorized modification or repair or repair carried out by persons other than those designated by the Company
 - C. Damage due to natural disasters (fire, earthquake, flood, etc)
 - D. Loss of the warranty card
3. Products eligible for warranty are acknowledged only when the date of purchase can be verified through the receipt. The warranty period for free service is 1 year from the date of purchase.

For more information and assistance on Hancom Lifecare products, contact your local representatives or Hancom Lifecare Customer Service.

Hancom Lifecare Inc.

Made in Korea